













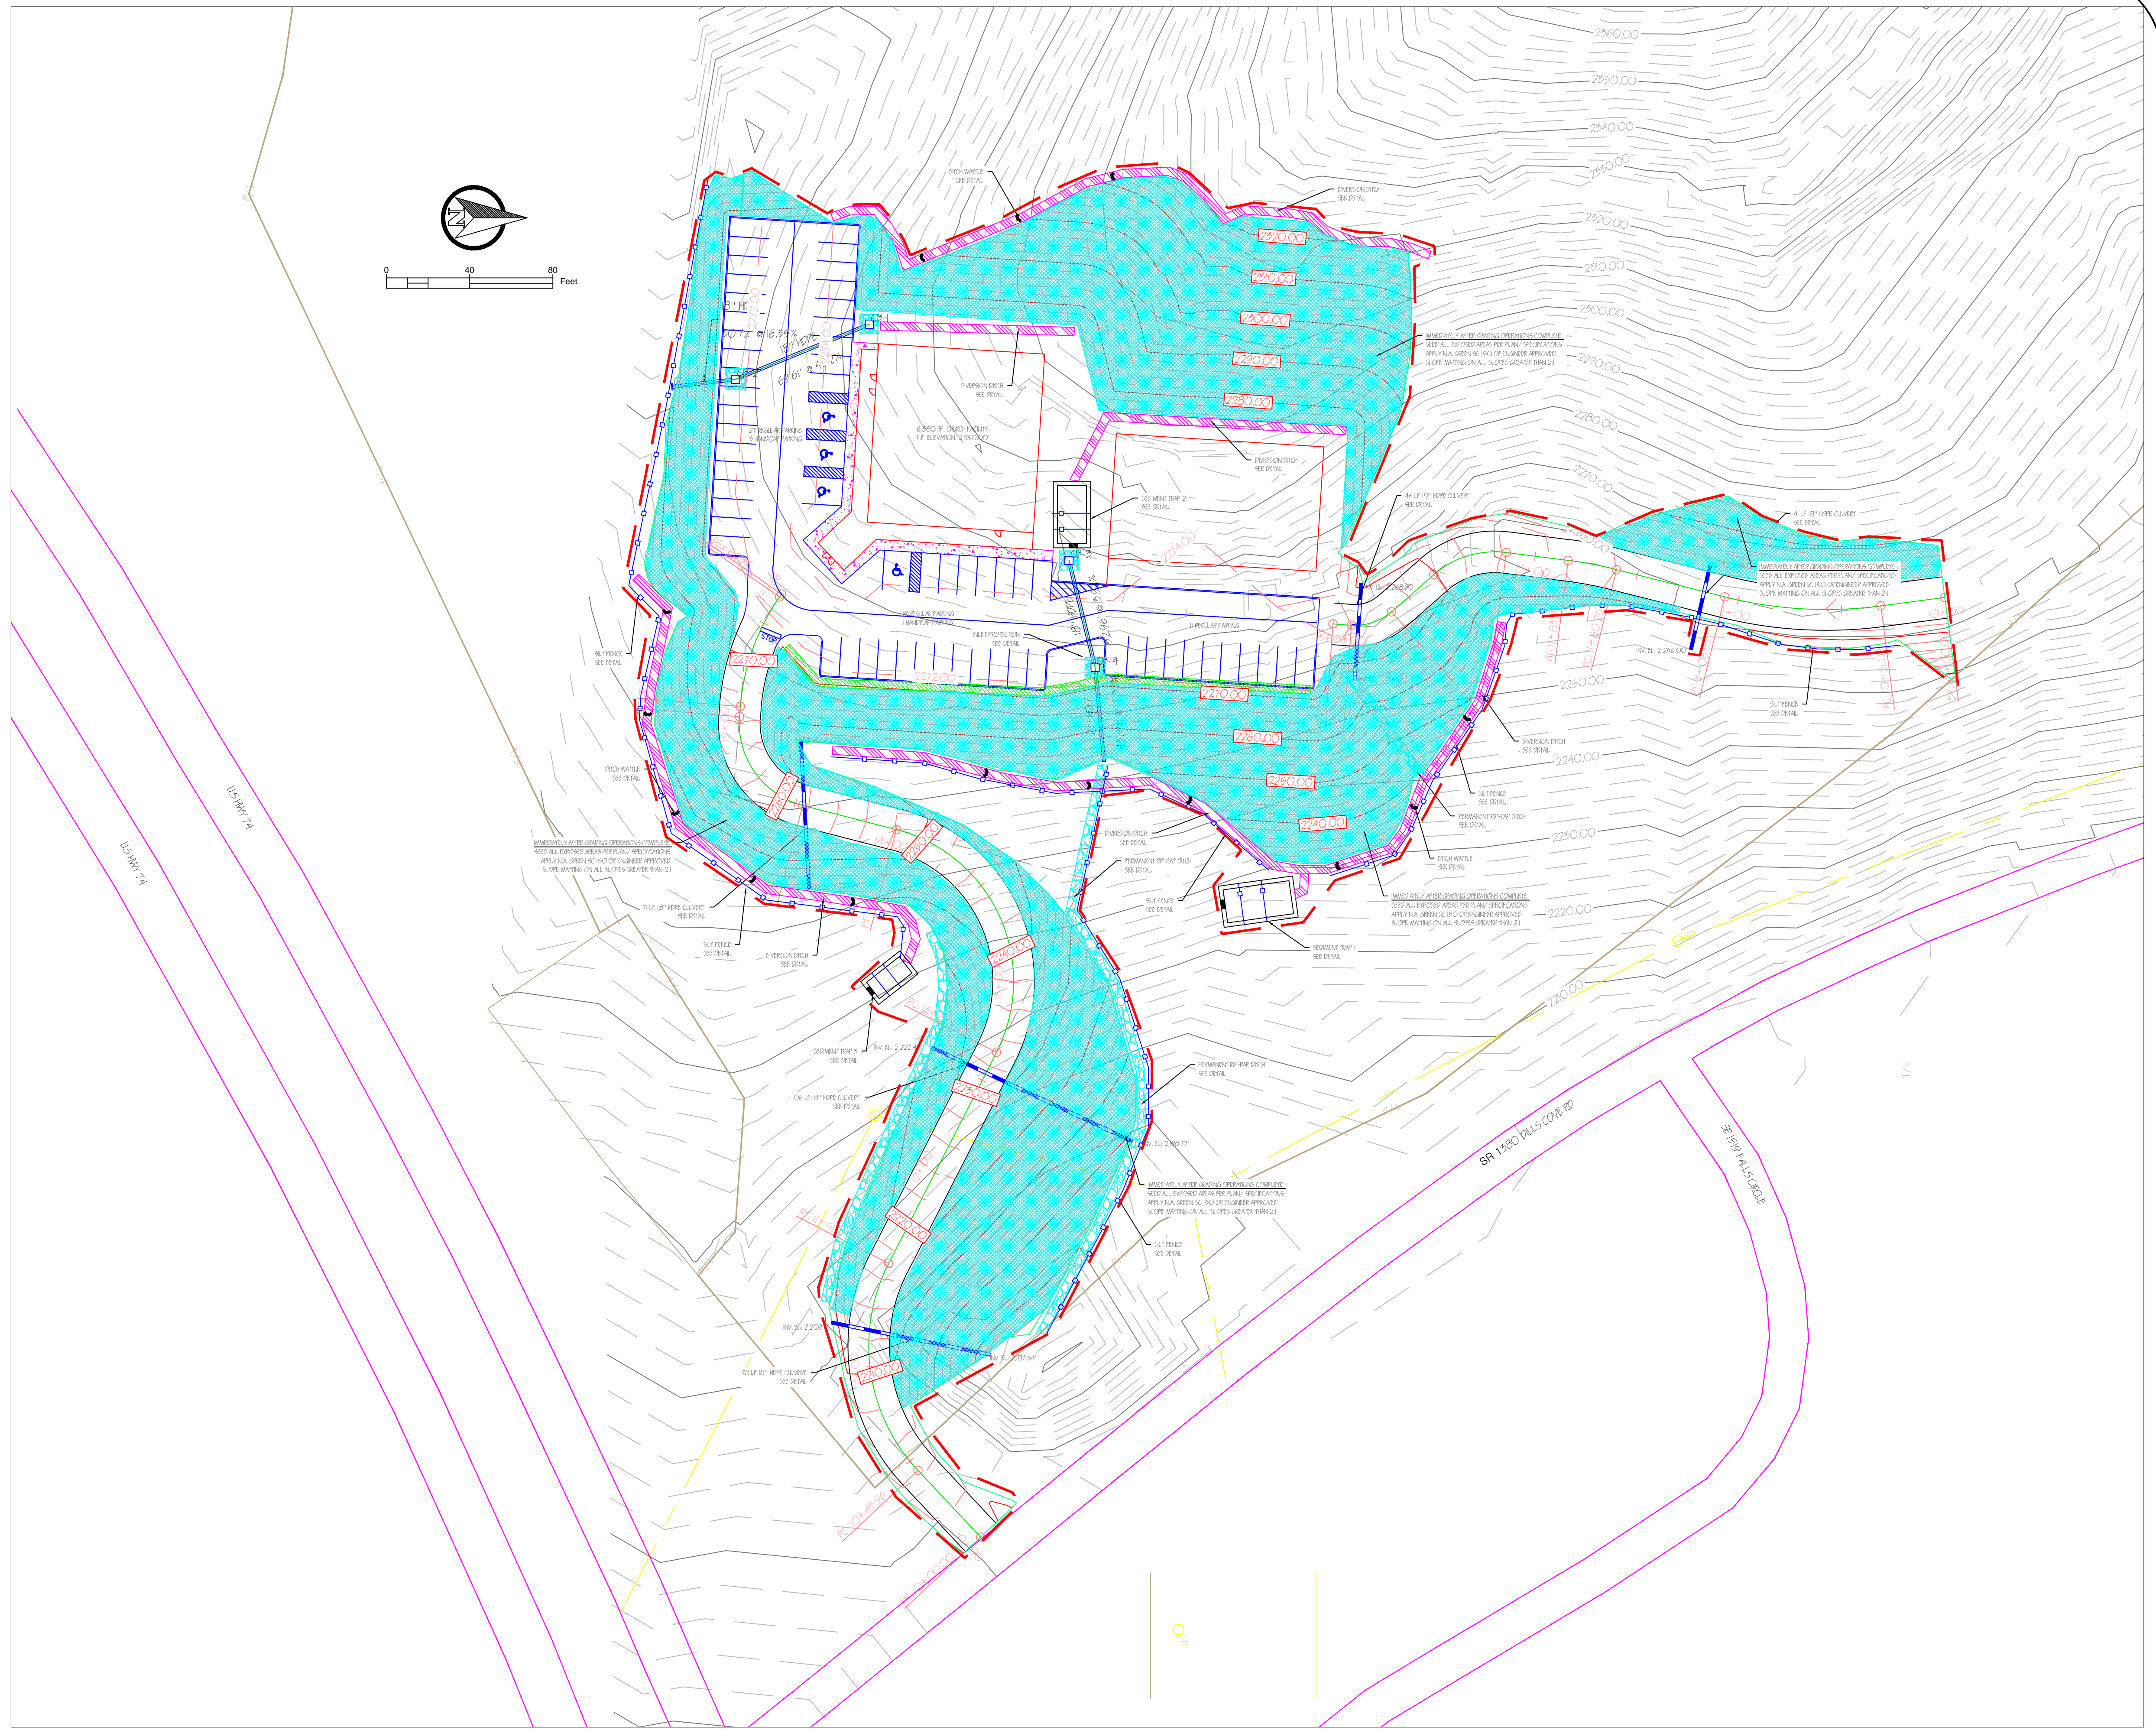


**LEGEND**

- GRAVEL 
- GRADED - GRASSED AREA 
- SLOPE MATTING 
- DIVERSION DITCH 
- RIP RAP DITCH 
- SILT FENCE 
- EXISTING OVERHEAD UTILITY 
- PROPOSED MAJOR CONTOUR 
- PROPOSED MINOR CONTOUR 
- EXISTING MAJOR CONTOUR 
- EXISTING MINOR CONTOUR 
- LIMITS OF DISTURBANCE 
- EXISTING UTILITY POLE 
- PROPERTY LINE 

- CONSTRUCTION / EROSION CONTROL SEQUENCE:**
1. THIS PROJECT WILL DISTURB APPROXIMATELY 3.8 ACRES OR LESS. THE CONTACT PERSON FOR EROSION CONTROL ISSUES IS ALEC STILLWELL: 828-586-6066.
  2. INSTALL ALL SILT FENCING AND CONSTRUCTION ENTRANCES AS SHOWN ON THE PLANS.
  3. CONSTRUCT TEMPORARY SEDIMENT TRAPS OR BASINS PER DETAILS.
  4. CONSTRUCT PROPOSED TEMPORARY AND PERMANENT DITCHES, BERMS AND DITCH CHECKS.
  5. INSTALL PERMANENT AND TEMPORARY STORM DRAINAGE SYSTEM COMPONENTS AS INDICATED ON THE PLANS, STARTING AT THE DOWNSTREAM END OF THE SYSTEM WORKING UPSTREAM AND INSTALL ALL INLET AND OUTLET PROTECTION DEVICES IMMEDIATELY AFTER CONSTRUCTION OF EACH STRUCTURE.
  6. CONSTRUCT ANY REMAINING EROSION CONTROL DEVICES.
  7. ALL EROSION CONTROL DEVICES SHALL BE CONSTRUCTED IN ACCORDANCE WITH THE NORTH CAROLINA EROSION AND SEDIMENT CONTROL PLANNING AND DESIGN MANUAL.
  8. STABILIZE SITE AS AREAS ARE BROUGHT TO FINISHED GRADES IN ACCORDANCE WITH SEEDING AND PLANTING SPECIFICATIONS FOR THE PROJECT. ALL SLOPES WILL RECEIVE NORTH AMERICAN GREEN SC150 SLOPE MATTING OR ENGINEER APPROVED EQUAL FOLLOWING SEEDING AND MULCHING.
  9. THE CONTRACTOR SHALL DILIGENTLY AND CONTINUOUSLY MAINTAIN ALL EROSION CONTROL DEVICES AND STRUCTURES TO MINIMIZE EROSION. SHOULD THE CONTRACTOR FAIL TO MAKE NECESSARY REPAIRS AND/OR MODIFICATIONS TO EROSION CONTROL MEASURES UPON NOTIFICATION FROM THE OWNER OR THE ENGINEER AND WITHIN THE TIME FRAME ALLOWED BY LOCAL AND STATE REGULATIONS THE OWNER MAY PERFORM THE REQUIRED WORK AND BACK CHARGE THE CONTRACTOR FOR ANY COSTS EXCEEDING CONTRACT PRICES STATED IN THE CONTRACT FOR SUCH WORK.
  10. ADDITIONAL EROSION CONTROL MEASURES MAY BE NEEDED AS SITE CONDITIONS WARRANT OR AS PER THE EROSION CONTROL INSPECTOR AND SHALL BE PAID BY THE CONTRACT UNIT PRICES FOR SUCH.
  11. THE CONTRACTOR, AT HIS COSTS, WILL TEMPORARILY SEED, MULCH AND STABILIZE GRADED AREAS THAT GRADING OPERATIONS ARE NOT BEING PERFORMED ON AND WILL NOT BE BROUGHT TO FINAL GRADE FOR A PERIOD OF MORE THAN 10 CALENDAR DAYS.
  12. ONCE THE SITE HAS BEEN STABILIZED AND APPROVED BY THE GOVERNING LOCAL AND/OR STATE AGENCY REGULATING THE PROJECT, THE CONTRACTOR WILL REMOVE ALL MEASURES.



**STILLWELL ENGINEERING, PA**  
 N.C. FIRM LICENSE NO. C-2996  
 PO BOX 838  
 SYLVA, NC 28779  
 PHONE: 828-586-6066  
 FAX: 828-586-6566

SUMMIT CHURCH  
 FAMILY RESOURCE COMPLEX  
 SYLVA, NC



Erosion Control and Grading Plan

PLAN  
 FOR REVIEW PURPOSES ONLY  
 NOT FOR CONSTRUCTION

DESIGN BY: WAS	DRAWN BY: WAS
SHEET: 1	DATE: 1/30/13
SCALE: 1 INCH = 40 FEET	
REVISIONS	
NO	DESCRIPTION